


FPO Box 14527, Wadeville 1422  
562 Crocker Road  
Wadeville, Johannesburg

Tel: (011) 827-5848  
Fax: (011) 827-5832  
E-mail: oilflow@oilflow.co.za  
www.oilflow.co.za

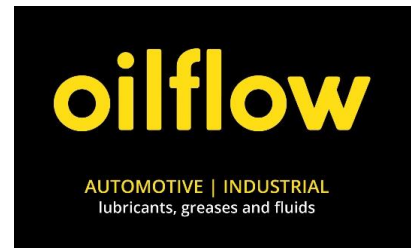

## TECHNICAL DATA SHEET

### Fleetline ATF DX III

---

#### PRODUCT DESCRIPTION

ATF DX III is an automatic transmission fluid for use where manufacturer calls for a Dexron III fluid. It is blended from virgin base oils, which have been fortified with anti-wear, antioxidant, anti-foam, anti-corrosion and viscosity index improvers together with friction modifiers. This blend of components gives high levels of performance and long service life.

#### PERFORMANCE STANDARDS

:

- DEXRON III
- ALLISON C-3
- DAIMLER BENZ 236.1
- CAT TO-2
- DENISON HF-0
- ZF TE – ML 09/11/14
- VOITH
- GM IIIH
- Ford M
- Allison TES-389B

#### APPLICATIONS

- Automotive heavy-duty automatic transmissions.
- Hydraulic systems.
- Power shift transmissions.
- Certain Screw type air compressor.
- Power steering.
- Certain manual transmissions.



FPO Box 14527, Wadeville 1422  
562 Crocker Road  
Wadeville, Johannesburg

Tel: (011) 827-5848  
Fax: (011) 827-5832  
E-mail: oilflow@oilflow.co.za  
www.oilflow.co.za



## TECHNICAL DATA SHEET

### Fleetline ATF DX III

#### BENEFITS

- Excellent anti wear properties and frictional characteristics.
- Ensures extended equipment life.
- Outstanding low temperature properties.
- Excellent seal compatibility.
- Oxidation control.
- Smooth gear change.

#### KEY PROPERTIES

Appearance		Red
Density @20 °C	kg/L	0.876
Viscosity @40 °C	cSt	40
Viscosity @100 °C	cSt	8.6
Viscosity Index		173
Pour point	°C	-45
Flash point C.O.C.	°C	350

PACKAGE SIZE	500 ml	5 Litres	20 Litres	210 Litres
Fleetline ATF DX III	✓	✓	✓	✓

